

AEC POLYMERS[®]

Stronger, We bond !



SHIPBUILDING

SAILING BOATS | MOTOR BOATS | ACCESSORIES

FIRM PRESENTATION



With the ambition of becoming the structural bonding leader and rewarded with the research department in 2003 and 2009 by an innovation award, AECpolymers® takes today the challenge up. Located in Bordeaux (France), AECpolymers® offers a wide range of products which ensures to suit to all industrial assembly applications. Our efficient products and their exceptional performances are recognized all over the world.

***With us
you will bond
stronger !!***

PERFORMANCE



Thanks to its experts team, AECpolymers® designs high performance products which could be applied in various fields from transports to composites. They bond on all cleaned and dry-cleaned supports and they resist to all weathering events.

PROFITABILITY



AECpolymers® technology is perfect to replace classical assembly solutions as fasteners or welding, and ensure you a considerable amount of times and a significant increase of your productivity.

EFFICIENCY



Endowed with an experts' laboratory and with a reactive after-sales service department, AECpolymers® guarantees you a perfect adaptation to your needs and an optimum listening in order to always go with you straight to the excellence.

ECOLOGY



Concerned by ecology, AECpolymers® designs its products in considering the environment and the users. Indeed, thanks to its innovative technologies without volatile organic compounds emissions, solvents or dangerous materials, its products are safe and easy to use.

OUR TECHNOLOGY

Today, it's time to bank on sustainable high technology products so as to obtain maximum advantages. Our systems meet this necessity thanks to their specific formula.

In continuous innovation, AECpolymers® has created two ranges with higher capacities :

Our MSpolymer®, from the **BLACK MAMBA®** range, are single component adhesives, solvent free and smell which allow bonding and jointing. Their adhesive performance on all materials, dry-cleaned thanks to our T700, their flexibility and their resistance to all weathering events make them ideal substitutes to silicones and PU.

The **SAF®** range (Strenghts Are Flex) is made up of structural high performance adhesives without primary and surface preparation. The exceptional qualities of this range allow a structural bonding on wide surfaces, in mass production, and an incomparable resistance to the expansion and vibrations.

Our products are made without solvent and are safe for the user.

OUR ADVANTAGES

- Taylor made products
- Quick and easy to use
- Durability
- Solvent free
- Aesthetic & resistant


OUR APPLICATION FIELDS

More polyvalent, our products are suited to all materials in various fields. Our experts' team target the appropriate choice according to your needs.

Our expertises are :

- Construction and design
- The composites
- Transports
- Shipbuilding industry
- Sign industry

ASSEMBLY SOLUTIONS

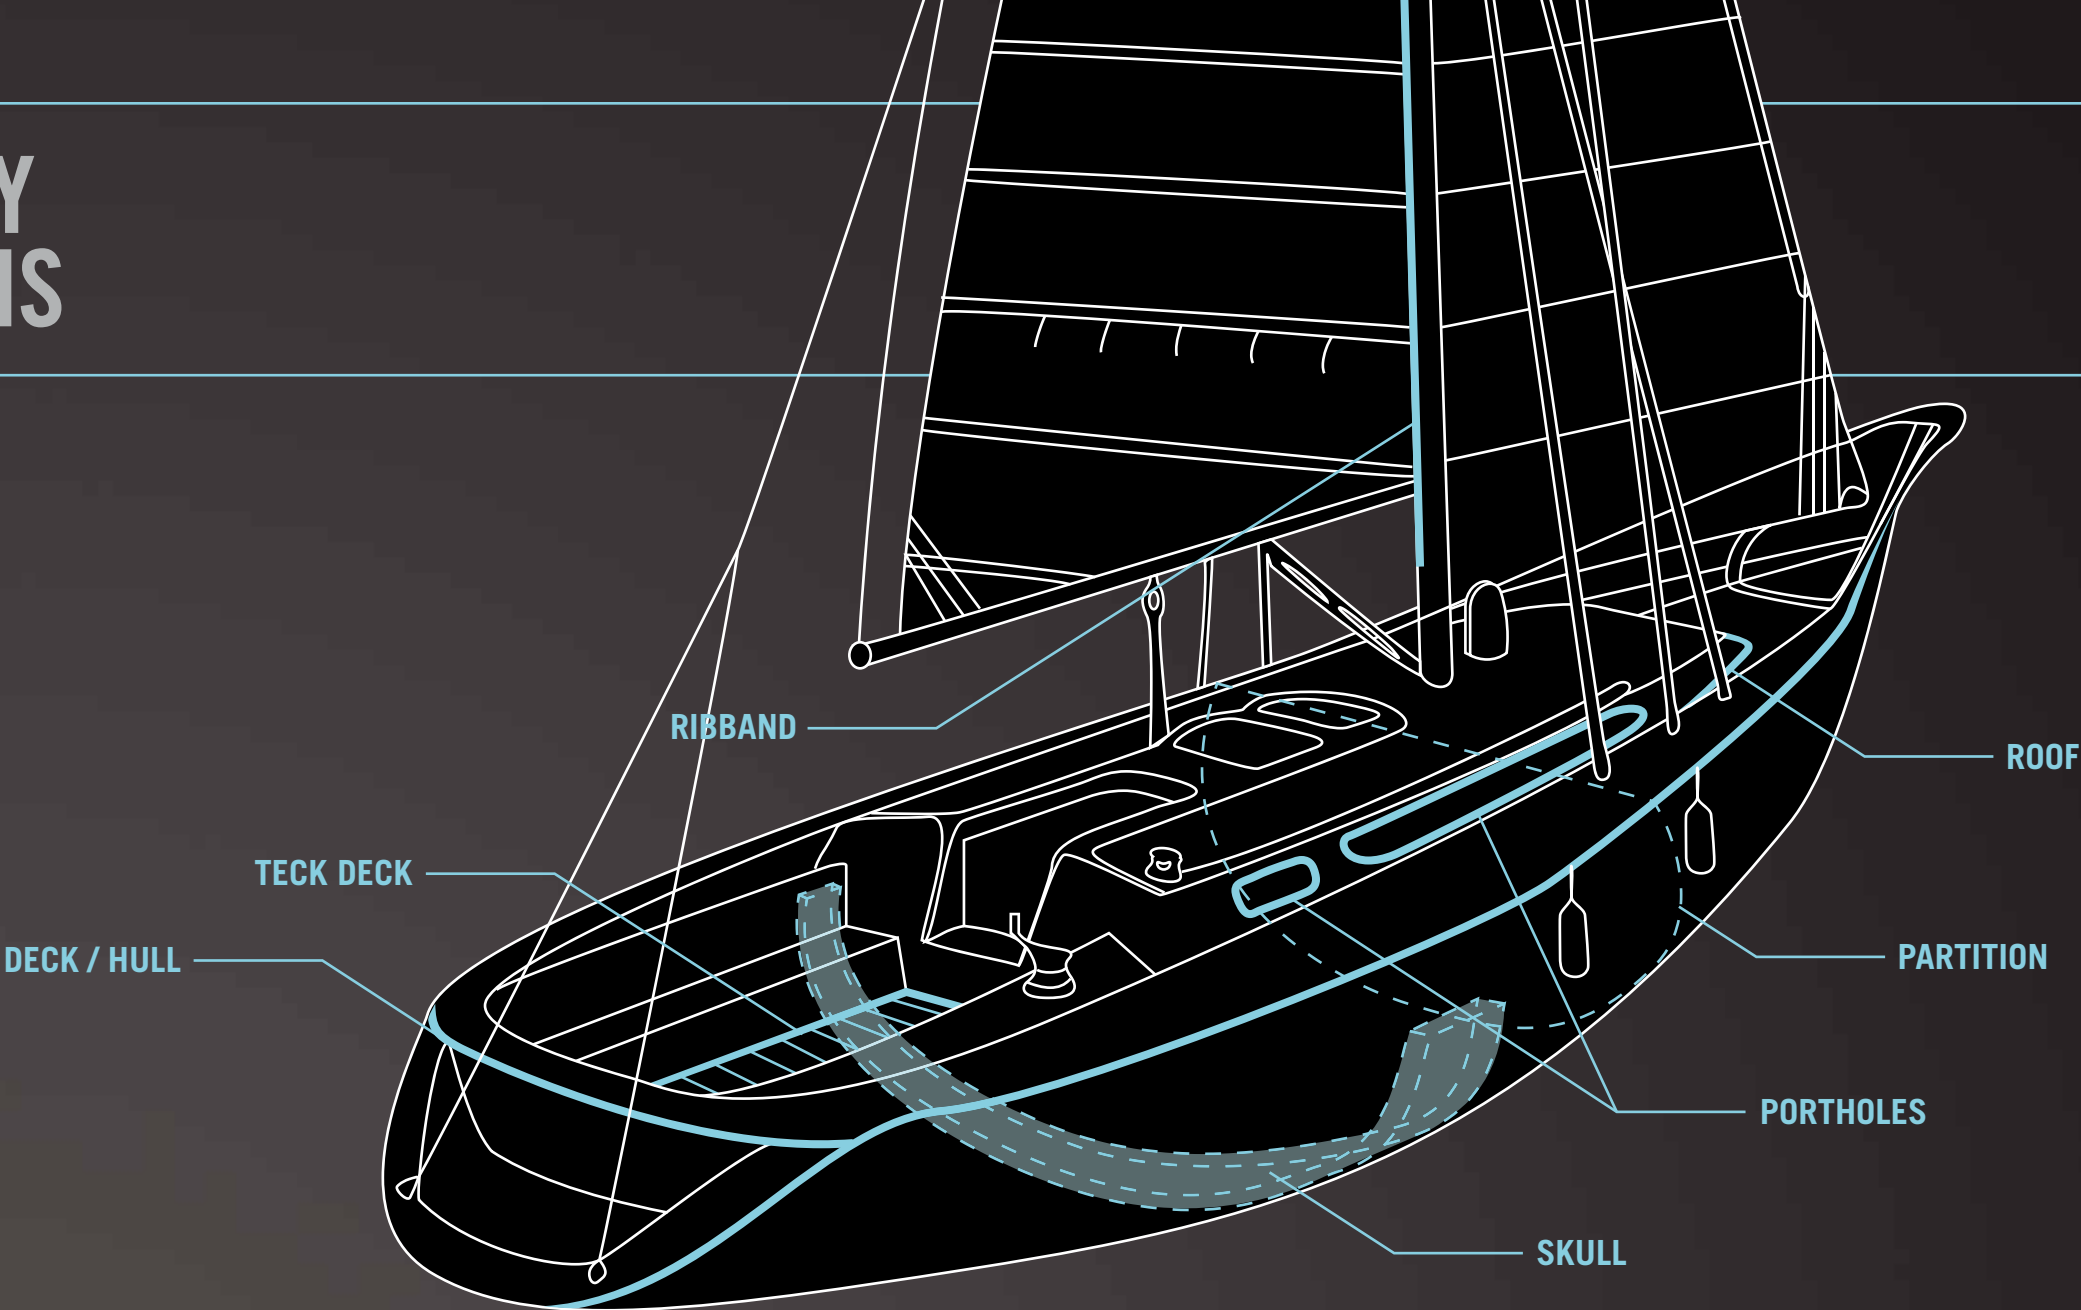

YOUR
APPLICATION

DECK / HULL

SKULL / ROOF / RIBBAND

PARTITION

PORTHOLE

TECK DECK

YOUR
SUBSTRATES

ALUMINIUM

EPOXY

FRP / COMPOSITE

ALUMINIUM

EPOXY

FRP / COMPOSITE

COMPOSITE

FRP

PMMA / FRP

TECK

OUR
SOLUTIONS

SAF® 150

SAF® 30

P 730
SAF® 150

SAF® 150

SAF® 30
SAF® 150

P 750
SAF® 150

P 730

P 750

SAF® 400

MS 60 BM BLACK

OUR
ADVANTAGES

High resistance bonding,
bonding with differential thermal expansion,
asymmetric bonding

High resistance bonding,
bonding with differential thermal expansion,
chemical thixotropy composite bonding,
high resistance composite bonding

Chemical thixotropy and flexible bonding,
chemical thixotropy and resistant bonding

Flexible and
resistant bonding

Flexible and
resistant bonding

TECHNICAL CHARACTERISTICS

SOLUTIONS	BASE	COLOUR	VISCOSITY (mPa.s @ 25°C)	OPEN TIME (MIN)	HANDLING TIME	FULL CURE TIME	HARDNESS SHORE A-D	DENSITY	SHEAR CONSTRAINT (MPa)	ELONGATION (%)	BI COMPONENT RATIO	ACCREDITATION
SAF® 150	METHACRYLATE	R : BEIGE D : WHITE	R : 16 000 D : 11 000	5 : 2 15 : 7 45 : 20	5 : 5 MIN 15 : 15 MIN 45 : 45 MIN	24 H	60 D	1.00	16	150	1/10	NAUTICAL & M1F1 RAILWAY
SAF® 30	METHACRYLATE	R : BEIGE D : WHITE	R : 1 000 D : 11 000	5 : 2 15 : 7 45 : 20	5 : 5 MIN 15 : 15 MIN 45 : 45 MIN	24 H	75 D	1.00	25	30	1/10	NAUTICAL
SAF® 400	METHACRYLATE	R : BLACK D : TRANSPARENT	R : 16 000 D : 11 000	5 : 2 15 : 7 45 : 20	5 : 5 MIN 15 : 15 MIN 45 : 45 MIN	24 H	50 A	0.96	6	400	1/10	NAUTICAL, M1F1 RAILWAY & CAR INDUSTRY
MS 60 BM	MS POLYMER®	BLACK, WHITE, GREY	60 000/70 000	10 - 15	24 H	2 MM/24 H	60 A	1.53	2	100	SINGLE COMPONENT	M1F1 RAILWAY
P 750	POLYURETHANE	R : WHITE D : BEIGE	R : 8 000/10 000 D : 3 000/4 000	5 - 7	2 H	48 H	50 D	1.50	10	25	1/1	N.A.
P 730	POLYURETHANE	R : WHITE D : BROWN	R : 8 000/10 000 D : 3 000/4 000	20 - 25	5 H	48 H	40 A	1.30	10	100	1/1	NAUTICAL

We advise you to use our surface preparator named **T700**
before each application in order to guarantee an optimum bonding.




SIGN INDUSTRY

SIGNS | TOTEMS | ROADSIGNS | POS



TRANSPORTS

CAR INDUSTRY | AERONAUTIC | RAILWAY



COMPOSITE

FRP | EPOXY | CARBON | STEEL



BUILDING

FRONT WALLS | DESIGNING | SECURITY

AECPOLYMERS®

Zone industrielle Eyrialis
33114 Le Barp - FRANCE

T. +0033 557 261 515

F. +0033 556 367 523

contact@aecpolymers.com

www.aecpolymers.com



SHIPBUILDING

SAILING BOATS | MOTOR BOATS | ACCESSORIES